

## Installation & Operations Manual 2010 Kubota RTV 900 Soft Top & Rear Panel



Seizmik makes Windshields, Doors, Tops, Hood Racks, Brush Guards, and other great accessories for utility vehicles & side x sides. Our products are engineered tough for long life and tested under the harshest of conditions. Always observe the warnings and precautions in this manual when using your Seizmik products. For best results, carefully follow the instructions in this manual and make no modifications.

Seizmik products are designed, developed and manufactured by Vialink Corp. If you have any questions, comments, need assistance, or are missing parts, please call 1-866-838-3366 ext. 110 between 9:00AM and 5:00PM EST. You can email us at [support@seizmik.com](mailto:support@seizmik.com).

### How to use this manual:

- Be sure to read through the entire manual carefully before beginning installation.
- Read all warnings and precautions carefully and follow safety procedures
- Each Seizmik product has a "difficulty-to-install" rating based on the following:
  - Easy – uses basic hand tools and does not require any modifications to the existing structure of your vehicle. Most Seizmik products fall into this category. Hey, why be difficult?
  - Skilled – requires a little more skill to install properly. May require modifications to the vehicle (drilling, electrical, etc. as well as the use of power tools.
  - Difficult – May require welding or extensive mechanical work for proper installation. Hardly any Seizmik products fall into this category but we had to say it.
- Watch for the following symbols:



**CAUTION** – Indicates an installation or operational step or procedure that if not followed could result in damage to the product or you. Use caution when you see this symbol and follow all instructions.



**TIP** – Indicates an installation or operation tip. These tips can help you avoid installation problems, ensure safe and easy operation, and make sure everything goes smoothly.



**WARNING** – Indicates an installation or operational procedure that must be observed to prevent serious injury or death.

### Installation information:

- This product has an installation rating of: **Easy**
- Approximate installation time: **5 Minutes**
- This product is easiest to install with: **1 Person**

### Trailer Info:


ONLY trailer with rear window open and top fully an properly secured.  
MAX SPEED – 55 MPH




## RTV 900 Soft Top Installation (continued)



1. If you currently have a Seizmik windshield, remove the top (2) black plastic windshield clamps.

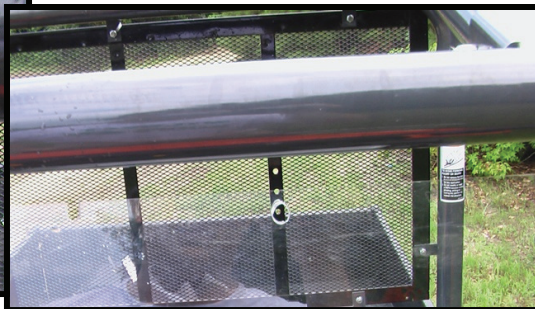

2. Fasten the (3) tension straps on the top of the ROPS as shown. These straps prevent the roof from sagging

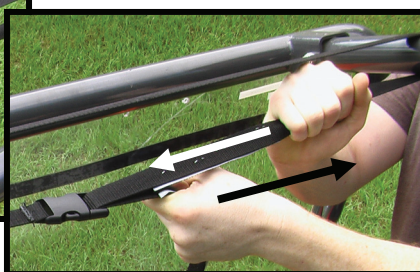

 **Tip** – A good way to tighten is to push the connected strap away from you and pull the loose strap toward you at the same time.



3. Lay the soft top over the roll cage of the vehicle making sure the straps are on the outside of the ROPS.

Rear

Front




4. Reinstall the (2) windshield clamps in the slots of the (2) front straps as shown.



## RTV 900 Soft Top Installation (continued)



5. Locate the strap on the driver side at the front cross bar of the ROPS. Fasten around the bar. Repeat this step for the passenger side of the top.

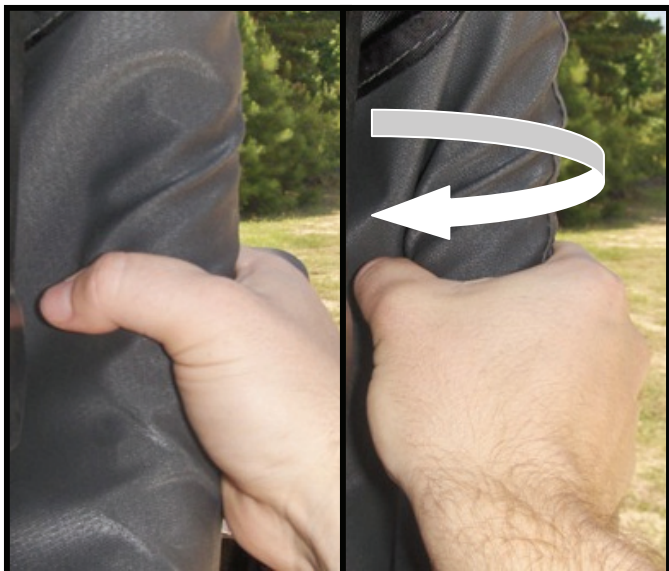

6. Locate the straps running down the length of the rear vertical ROPS bar. Fasten around the bar. Repeat this step for the opposite side.

Tip – A good way to get the straps tight is to rotate the top around the bar like in the picture on the right.




7. Locate the large straps that run front to rear and fasten them.

Tip – Fasten them above the support straps, as shown, for more head room.




8. Pull the front of the cab down until it is taut and level. Place the 2" adhesive velcro squares as shown on the front corner of the ROPS just below the bend. This holds the front corners of the top in place. Repeat on both sides.

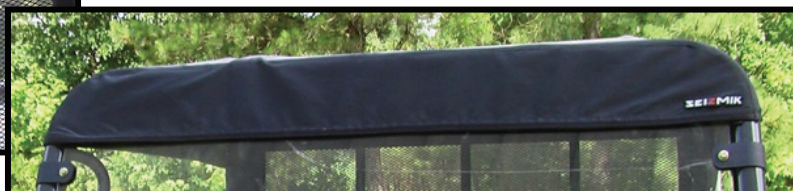


## RTV 900 Soft Top Installation (continued)



9. Locate the strap on the driver side at rear of the cab. Fasten around the bar as shown below.

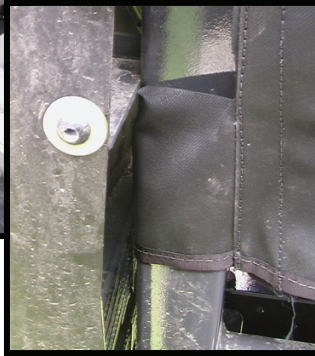

10. Locate the strap on the passenger side with the adhesive velcro strip. Clean the plastic panel on the vehicle with alcohol, remove the strip and secure to plastic panel as shown.

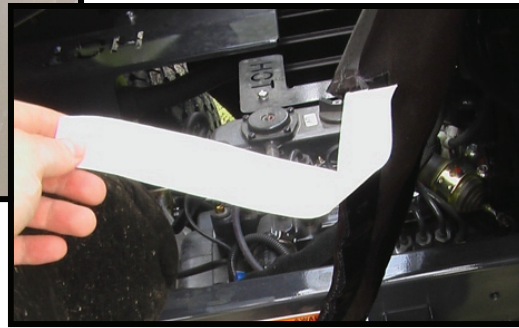


Some adjustment may be necessary to ensure a proper fit.

**Congratulations** – You have now finished the installation of your Seizmik RTV900 Soft Top.

## Ranger Soft Top Features



**A** - The rear window can be rolled up by undoing step 3, rolling the window up from the bottom, and securing with the three straps at the top of the window as shown.



**B** – The velcro strip along the front of the soft top is so it can be attached to a windshield.

**How to get Help** - If you have any questions, comments, need assistance, or are missing parts, please call 1-866-838-3366 ext. 110 between 9:00AM and 5:00PM EST. You can email us at [support@seizmik.com](mailto:support@seizmik.com), visit [www.seizmik.com](http://www.seizmik.com) to download installation guides and product info, or contact your powersports dealer where you purchased your Seizmik product if you need additional assistance.